

# A2A Series

2 Socket MIL-Style, Polycarbonate Molded Connector, Permanent Mount, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE

## Product Features

2 Socket Connection for use with CTC Standard and Compact Size, Single-Axis Sensors

316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

► Not Advisable for Use in Paper Mills

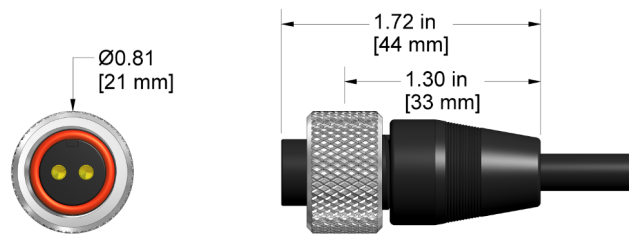

## Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	2 Socket MIL-Style
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-)

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900