

TA201-M12A Series



Premium Dual Output Sensor, Temperature & Acceleration, Top Exit
4 Pin M12 Connector, 100 mV/g, 10 mV/°C, ±5%

VIBRATION ANALYSIS HARDWARE



Product Features

Premium Performance Sensor


Helps to Detect Bearing Defects and Temperature Changes

- ▶ Temperature (10 mV/°C) and Acceleration (100 mV/g) Outputs in One Sensor via a 4 Pin M12 Connection
- ▶ Popularly sold with SC300 Series Signal Conditioners with built-in Temperature Output

TA201-M12A

4 Pin Connector


Connector Pin	Polarity
1	(+) Signal/Power
2	(-) Common
3	Not Used
4	(+) Temperature Voltage



Stock Product

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	TA201-M12A	M/ or M8/TA201-M12A	Environmental		
Sensitivity (±5%)	100 mV/g		Operating Temperature Range	-40 to 250 °F	-40 to 121 °C
Frequency Response (±3dB)	30-900,000 CPM	0,5-15000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	120-720,000 CPM	2,0-12000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 80 g, peak *Vsource ≥ 22V, 12Vbias		Sealing	IP68	
Temperature Measurement Range	-40 to 250 °F	-40 to 121 °C	Submersible Depth	200 ft.	60 m
Temperature Output	10 mV/°C		Physical		
Temperature Sensor	750 mV = 25 °C (±1)		Sensing Element	PZT Ceramic	
Electrical			Sensing Structure	Shear Mode	
Settling Time	<2.5 seconds		Weight	3.2 oz	90 grams
Voltage Source (IEPE)	18-30 VDC		Case Material	316L Stainless Steel	
Constant Current Excitation	2-10 mA		Mounting Thread	1/4-28 Blind Tapped Hole	
Spectral Noise @ 10 Hz	14 µg/√Hz		Connector (Non-Integral)	4 Pin M12	
Spectral Noise @ 100 Hz	2.3 µg/√Hz		Resonant Frequency	1,380,000 CPM	23000 Hz
Spectral Noise @ 1000 Hz	2 µg/√Hz		Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
Output Impedance	<100 ohm		Mounting Hardware Supplied	1/4-28 Stud	M6x1 or M8x1.25 Adapter Stud
Bias Output Voltage	10-14 VDC		Calibration Certificate	CA10	
Case Isolation	>10 ⁹ ohm				

Typical Frequency Response

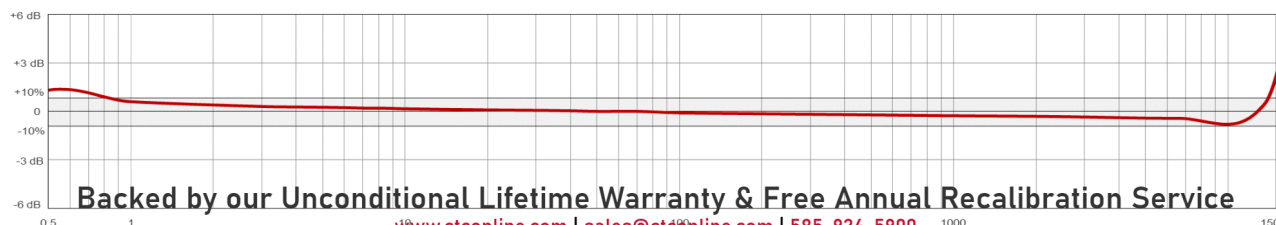

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service