

A2L Series

2 Socket MIL-Style, Polycarbonate Molded Hydraulic Hose Connector, Permanent Mount, 212 °F (100 °C) Max Temp





VIBRATION ANALYSIS HARDWARE



Product Features

Compatible with CTC CB500 Series Hydraulic Hose Protected Cabling

- ▶ 2 Socket Connection for use with CTC Standard and Compact Size, Single-Axis Sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

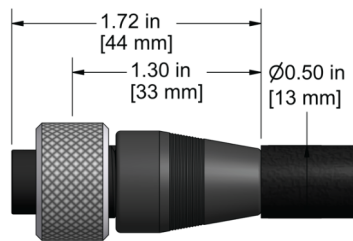

Specifications

Application	Permanent Mount
Max Temperature	212 °F (100 °C)
Connector Type	2 Socket MIL-Style Hydraulic Hose
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900