

A2N Series

2 Socket MIL-Style, Nylon Molded Connector, Permanent Mount,
250 °F (121 °C) Max Temp





VIBRATION ANALYSIS HARDWARE

Product Features

2 Socket Connection for use with CTC Standard and Compact Size, Single-Axis Sensors

316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

- ▶ Ideal for use in caustic environments with moderate temperatures (popularly sold to Paper & Pulp Industry)
- ▶ Chemical Compatibility: high corrosion resistance for caustic environments

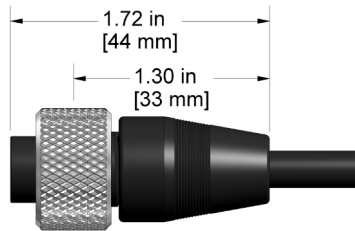

Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	2 Socket MIL-Style
Shell Material	Nylon Molded
Connector Insert Material	Nylon
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900