

A2R Series

High Temperature 2 Socket MIL-Style, PPS Molded Connector,
Permanent Mount, 392 °F (200 °C) Max Temp





VIBRATION ANALYSIS HARDWARE

Product Features

2 Socket Connection for use with CTC Standard and Compact Size, Single-Axis Sensors

316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

- ▶ High Temperature Resistance up to 392 °F (200 °C)
- ▶ Ideal for wide variety of high temperature, caustic industrial environments
- ▶ Chemical Compatibility: high corrosion resistance for caustic environments

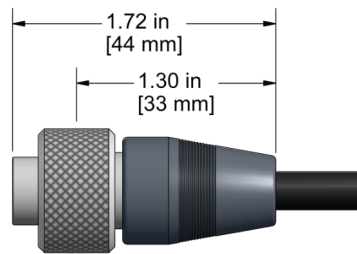

Specifications

Application	Permanent Mount
Max Temperature	392 °F (200 °C)
Connector Type	2 Socket MIL-Style
Shell Material	Polyphenylene Sulfide (PPS) Molded
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP68
Pin-Out	A = Signal (+) B = Signal (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900