

# A3AB Series





VIBRATION ANALYSIS HARDWARE

3 Socket MIL-Style, Polycarbonate Molded Connector for use with CTC Biaxial AC119-1D & BSFA333-IV Sensors, Permanent Mount, 250 °F (121 °C) Max Temp

## Product Features

- ▶ 3 Socket Connection for use with CTC Biaxial AC119-1D & BSFA333-IV Sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

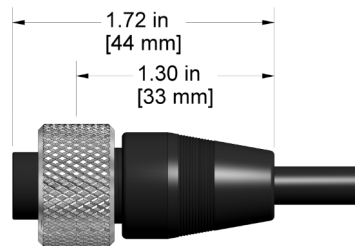

## Specifications

Application	Permanent Installation
Max Temperature	250 °F (121 °C)
Connector Type	3 Socket MIL-Style
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	A = Signal (+) CTC Green B = Signal (+) CTC White C = Common (-) CTC Black

Stock Product

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900