

A3E Series

3 Socket MIL-Style Right Angle Polycarbonate Molded Connector,
Permanent Mount, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ 3 Socket Connection for use with CTC Top Exit, Dual Output and Negative Voltage Sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

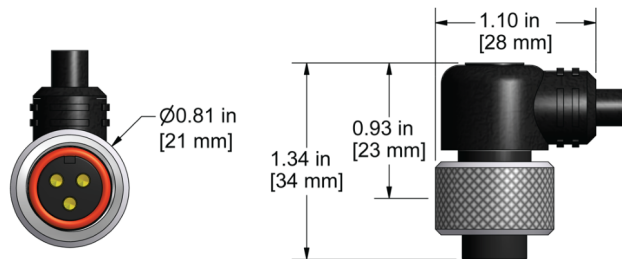

Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	3 Socket MIL-Style Right-Angle
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	A = Signal (+) CTC Red B = Common (-) CTC Black C = Signal (+) CTC White

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900