

# A3R Series

High Temperature 3 Socket MIL-Style, PPS Molded Connector,  
Permanent Mount, 392 °F (200 °C) Max Temp




VIBRATION ANALYSIS HARDWARE

## Product Features

High Temperature Resistance up to 392 °F (200 °C)

- ▶ 3 Socket Connection for use with CTC Dual Output and Negative Voltage Sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

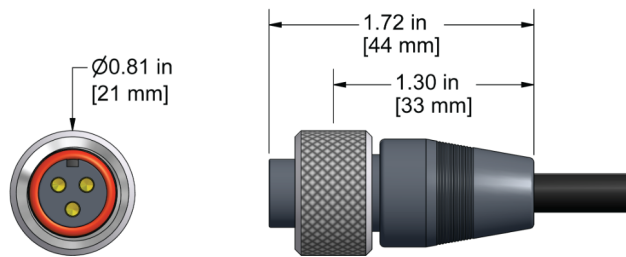

## Specifications

Application	Permanent Mount
Max Temperature	392 °F (200 °C)
Connector Type	3 Socket MIL-Style
Shell Material	Polyphenylene Sulfide (PPS) Molded
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP68
Pin-Out	A = Signal (+) CTC Red B = Signal (-) CTC Black C = Signal (+) CTC White

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900