

# A3V Series

High Temperature 3 Socket MIL-Style, Right Angle, PPS Molded Connector, Permanent Mount, 392 °F (200 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



## Product Features

- ▶ 3 Socket Connection for use with CTC Top Exit, Dual Output, and Negative Voltage Sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

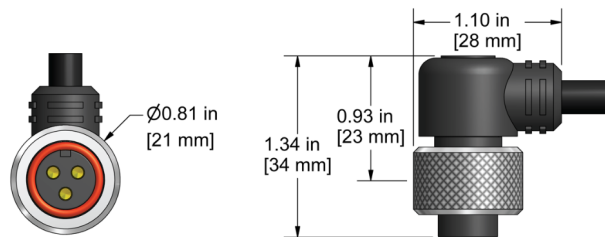

## Specifications

Application	Permanent Mount
Max Temperature	392 °F (200 °C)
Connector Type	3 Socket MIL-Style Right-Angle
Shell Material	Polyphenylene Sulfide (PPS) Molded
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP68
Pin-Out	A = Signal (+) CTC Red B = Common (-) CTC Black C = Signal (+) CTC White

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900