

A6A Series




VIBRATION ANALYSIS HARDWARE

6 Socket MIL-Style, Polycarbonate Molded Connector, Compatible with CTC Loop Power Triaxial Sensors, Permanent Mount, 250 °F (121 °C) Max Temp

Product Features

- ▶ 6 Socket Connection for use with CTC Triaxial Loop Power Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

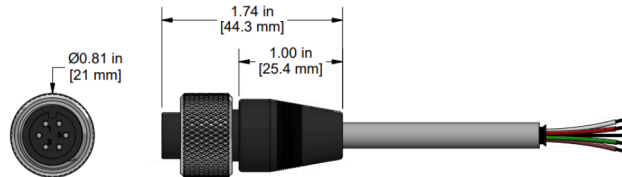

Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	6 Socket MIL-Style
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	1=Ch. Y (+) Loop Power 2=Ch. X (+) Loop Power 3=Ch. Z (+) Loop Power 4=Ch. Y (-) Loop Power Return 5=Ch. Z (-) Loop Power Return 6=Ch. X (-) Loop Power Return

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900