

AC134 Series

Low Frequency Accelerometer, Side Exit 2 Pin Connector, 500 mV/g, ±10%



VIBRATION ANALYSIS HARDWARE



Product Features

Designed for low speed Rotors, Main Bearings, and Gear Box Inputs, but can also be used for High Frequency Detection.

Can be used with any application that requires low and high frequency measurements.


- ▶ 500 mV/g Sensitivity, ±10% Sensitivity
- ▶ 0.1 Hz for Low Frequency Measurements
8,000 Hz for High Frequency Detection
- ▶ Standard 2 Pin MIL Connection or Integral Cable

Note: Integral Cable Options are only for Permanent Monitoring Applications

AC134-1D 2 Pin Connector	AC134-2D CB103 Integral Cable	AC134-3D CB206 Armored Integral Cable	AC134-6D CB611 Heavy Duty Armored Integral Cable																														
<table border="1"> <tr> <th>Connector Pin</th> <th>Polarity</th> </tr> <tr> <td>A</td> <td>(+) Signal/Power</td> </tr> <tr> <td>B</td> <td>(-) Common</td> </tr> </table> <p>Stock Product</p>	Connector Pin	Polarity	A	(+) Signal/Power	B	(-) Common	<table border="1"> <tr> <th>Conductor</th> <th>Polarity</th> </tr> <tr> <td>Red</td> <td>(+) Signal/Power</td> </tr> <tr> <td>Black</td> <td>(-) Common</td> </tr> <tr> <td>Shield</td> <td>Cable Drain Wire</td> </tr> </table> <p>Built To Order</p>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire	<table border="1"> <tr> <th>Conductor</th> <th>Polarity</th> </tr> <tr> <td>Red</td> <td>(+) Signal/Power</td> </tr> <tr> <td>Black</td> <td>(-) Common</td> </tr> <tr> <td>Shield</td> <td>Cable Drain Wire</td> </tr> </table> <p>Built To Order</p>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire	<table border="1"> <tr> <th>Conductor</th> <th>Polarity</th> </tr> <tr> <td>Red</td> <td>(+) Signal/Power</td> </tr> <tr> <td>Black</td> <td>(-) Common</td> </tr> <tr> <td>Shield</td> <td>Cable Drain Wire</td> </tr> </table> <p>Built To Order</p>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire
Connector Pin	Polarity																																
A	(+) Signal/Power																																
B	(-) Common																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC134	M/AC134	Environmental		
Sensitivity (±10%)	500 mV/g		Operating Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	6-480,000 CPM	0,1-8000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	36-180,000 CPM	0,6-3000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 16 g, peak *Vsource ≥ 22V, 12Vbias		Sealing	Welded, Hermetic	
Electrical			Submersible Depth	200 ft.	60 m
Settling Time	<2 seconds		SIL Rating	SIL 2	
Voltage Source (IEPE)	18-30 VDC		Physical		
Constant Current Excitation	2-10 mA		Sensing Element	PZT Ceramic	
Spectral Noise @ 10 Hz	1.7 µg/√Hz		Sensing Structure	Shear Mode	
Spectral Noise @ 100 Hz	0.2 µg/√Hz		Weight	5.7 oz	160 grams
Spectral Noise @ 1000 Hz	0.12 µg/√Hz		Case Material	316L Stainless Steel	
Output Impedance	<100 ohm		Connector (Non-Integral)	2 Pin MIL-C-5015	
Bias Output Voltage	10-14 VDC		Resonant Frequency	1,080,000 CPM	18000 Hz
Case Isolation	>10 ⁸ ohm		Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
			Mounting Hardware Supplied	1/4-28 Captive Bolt	M6x1 Captive Bolt
			Calibration Certificate	CA10	

Typical Frequency Response

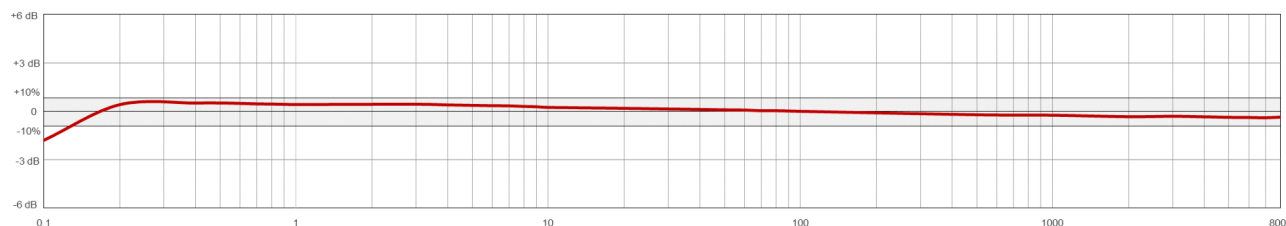

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900