


AC365 Series



VIBRATION ANALYSIS HARDWARE

Premium Triaxial Accelerometer, Top Exit 4 Pin Mini-MIL Connector, Follows Cartesian Phase Coordinate System, for Modal & ODS Analysis, 100 mV/g, ±5%



Product Features

Collect 3 Channels of Data Simultaneously for Faster Data Collection


Follows Cartesian Coordinate Phase Configuration (Right Hand Rule)

- ▶ High Performance Triaxial Sensor with High End Frequency Response of 10 kHz (+3dB)
- ▶ Popularly used for Modal Analysis and ODS (Operating Deflection Shape)
- ▶ Compatible with CTC J Series Mini-MIL Connectors

AC365-1D

4 Pin Connector


Connector Pin	Polarity
A (Axis Y/3)	(+) Signal/Power
B (Axis X/2)	(+) Signal/Power
C (Axis Z/1)	(+) Signal/Power
D	(-) Common/Grid



Stock Product

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC365	M/AC365	Environmental		
Sensitivity (±5%)	100 mV/g		Operating Temperature Range	-65 to 250°F	-54 to 121°C
Frequency Response (±3dB)	36-600,000 CPM	0.6-10000 Hz	Electromagnetic Sensitivity		CE
Frequency Response (±10%)	60-390,000 CPM	1.0-6500 Hz	Sealing		IP68
Frequency Response (±5%)	480-330,000 CPM	8.0-5500 Hz	SIL Rating		SIL 2
Dynamic Range	± 50 g, peak *Vsource ≥ 22V, 12Vbias		Physical		
Electrical			Sensing Element		PZT Ceramic
Settling Time	<2.5 seconds		Sensing Structure		Shear Mode
Voltage Source (IEPE)	18-30 VDC		Weight	7.1 oz	200 grams
Constant Current Excitation	2-10 mA		Case Material		316L Stainless Steel
Spectral Noise @ 10 Hz	27 µg/√Hz		Mounting Thread		1/4-28 Blind Tapped Hole
Spectral Noise @ 100 Hz	6.5 µg/√Hz		Connector (Non-Integral)		4 Pin Mini MIL Connector
Spectral Noise @ 1000 Hz	2.5 µg/√Hz		Resonant Frequency	1,380,000 CPM	23000 Hz
Output Impedance	<100 ohm		Mounting Torque	1 to 2 ft. lbs	1.4 to 2.7 Nm
Bias Output Voltage	10-14 VDC		Mounting Hardware Supplied	1/4-28 Captive Bolt	M6x1 Captive Bolt
Case Isolation	>10 ⁸ ohm		Calibration Certificate		CA10

Typical Frequency Response

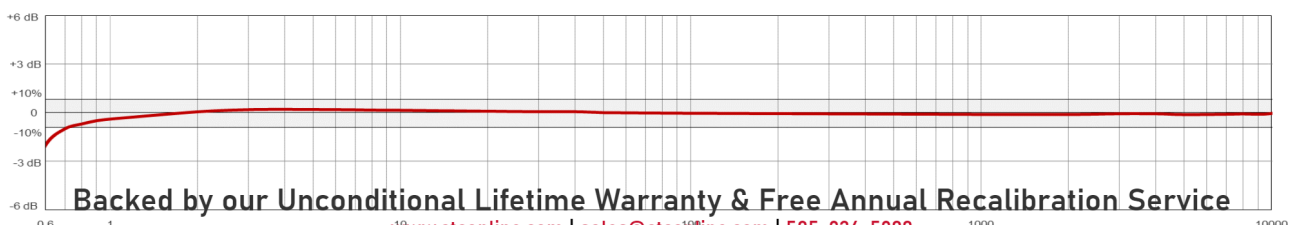

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900