

AC911 Series



VIBRATION ANALYSIS HARDWARE

Nonincendive Intrinsically Safe Accelerometer, CSA North America Class 1, Division 1 and IECEx/ATEX Zone 0,1 Approved Accelerometer, Top Exit 2 Pin Connector, 10 mV/g, ±10%



Product Features


Requires Intrinsic Safety Barrier

- ▶ CSA North America Class I, Groups A, B, C, D; Class II, Groups E, F, G; Class III
- ▶ IECEx Intrinsically Safe Approved (IEC 60079-0:2011, IEC 60079-11:2011)
- ▶ ATEX EU Approved Zone 0,1 Approved (EN IEC 60079-0:2018, EN 60079-11:2012)

AC911-1A

2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

AC911-2C

CB193 Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC911-3C

CB296 Armored Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC911	M/ or M8/AC911	Environmental		
Sensitivity (±10%)	10 mV/g		Operating Temperature Range	-40 to 250 °F	-40 to 121 °C
Frequency Response (±3dB)	60-900,000 CPM	1,0-15000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	120-360,000 CPM	2,0-6000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 800 g, peak		Sealing	IP68	
Electrical			Submersible Depth	200 ft.	61 m
Settling Time	<3 Seconds		Physical		
Voltage Source (IEPE)	18-28 VDC		Sensing Element	PZT Ceramic	
Constant Current Excitation	2-4 mA		Sensing Structure	Shear Mode	
Spectral Noise @ 10 Hz	100 µg/√Hz		Weight	3.2 oz	91 grams
Spectral Noise @ 100 Hz	90 µg/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 1000 Hz	85 µg/√Hz		Mounting Thread	1/4-28 Blind Tapped Hole	
Output Impedance	<100 ohm		Connector (Non-Integral)	2 Pin MIL-C-5015	
Bias Output Voltage	10-14 VDC		Resonant Frequency	1,380,000 CPM	23000 Hz
Case Isolation	>10 ⁸ ohm		Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
			Mounting Hardware Supplied	1/4-28 Stud	M6x1 or M8x1.25 Adapter Stud
			Calibration Certificate	CA10	

Typical Frequency Response

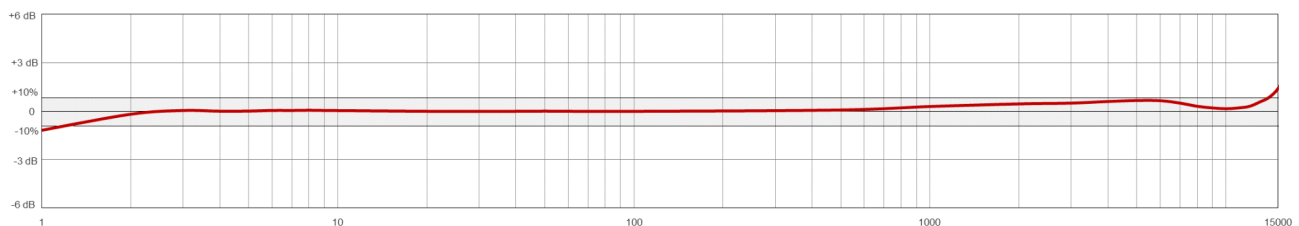

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900