

AC915 Series



VIBRATION ANALYSIS HARDWARE

Nonincendive Intrinsically Safe Accelerometer, CSA North America Class 1, Division 1 and IECEx/ATEX Zone 0,1 Approved Accelerometer, Top Exit 2 Pin Connector, 100 mV/g, ±10%



II 1 G D



IECEx SIR 15.0060X




Regulatory Information

Ex ia IIC T3/T4	Ex ia I Ma
CLI Groups A, B, C, D	Sira 15 ATEX 2152X
CLII Groups F, G	Ex ia IIC T3 Ga
CLIII	Ex ia I Ma
Operating Temperature Code: T4	
Ambient Temperature Range = -40 to 80°C	IECEx SIR 15.0060X
Operating Temperature Code: T3	Ex ia IIC T3/T4 Ga
Ambient Temperature Range = -40 to 125°C	Ex ia I Ma
Ui = 28 Vdc li = 100 mA	KEMA 04ATEX1066
CSA 221421	EX ia IIC T3/T4
	EX iaD A20 T150°C or T105°C
CSA 22 UKEX 1408X	
Ex ia IIC T3/T4 Ga	

AC915-1A

2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

AC915-2C

CB193 Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC915-3C

CB296 Armored Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC915	M/ or M8/AC915	Environmental		
Sensitivity (±10%)	100 mV/g		Operating Temperature Range	-40 to 250 °F	-40 to 121 °C
Frequency Response (±3dB)	30-900,000 CPM	0.5-15000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	60-360,000 CPM	1,0-6000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 80 g, peak		Sealing	Welded, Hermetic	
Electrical			Submersible Depth	200 ft.	61 m
Settling Time	<3 Seconds		Physical		
Voltage Source (IEPE)	18-28 VDC		Sensing Element	PZT Ceramic	
Constant Current Excitation	2-4 mA		Sensing Structure	Shear Mode	
Spectral Noise @ 10 Hz	6.5 µg/√Hz		Weight	3.2 oz	90 grams
Spectral Noise @ 100 Hz	2 µg/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 1000 Hz	1.8 µg/√Hz		Mounting Thread	1/4-28 Blind Tapped Hole	
Output Impedance	<100 ohm		Connector (Non-Integral)	2 Pin MIL-C-5015	
Bias Output Voltage	10-14 VDC		Resonant Frequency	1,380,000 CPM	23000 Hz
Case Isolation	>10 ⁹ ohm		Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
			Mounting Hardware Supplied	1/4-28 Stud	M6x1 or M8x1.25 Adapter Stud
			Calibration Certificate	CA10	

Typical Frequency Response

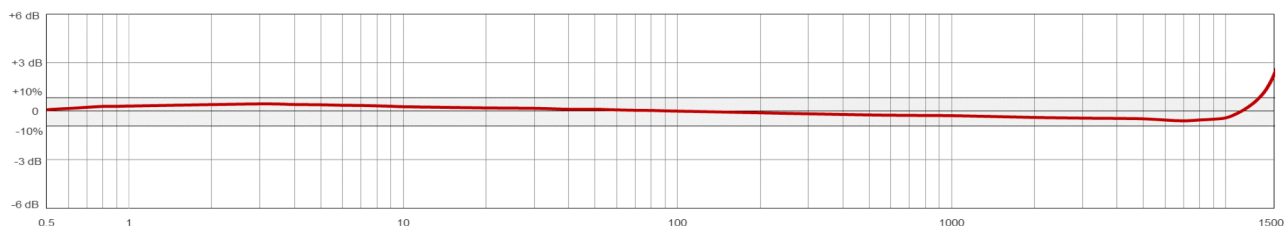

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900