

# AC980 Series



VIBRATION ANALYSIS HARDWARE

Nonincendive Intrinsically Safe, CSA North America Class 1, Division 1 and IECEx/ATEX Zone 0,1 Approved Triaxial Accelerometer, Side Exit 4 Pin Mini-MIL Connector, 100 mV/g, ±10%




## Regulatory Information

Ex ia IIC T3/T4 Ga	CSA 22 UKEX 1408X
AEx ia IIC T3/T4 Ga	Ex ia IIC T3/T4 Ga
CLI Groups A, B, C, D	Ex ia I Ma
CLII Groups E, F, G; CLIII	
CLI, Zone 0	Sira 15ATEX2152X
	Ex ia IIC T3 Ga
	Ex ia I Ma
Operating Temperature Code: T4	
Ambient Temperature Range = -40 to 80°C	
Operating Temperature Code: T3	IECEx SIR 15.0060X
Ambient Temperature Range = -40 to 121°C	Ex ia IIC T3 Ga
Control Drawing INS10012	Ex ia I Ma
Ui = 28 Vdc Ii = 112 mA	
Pj = 1W, Ci = 63.036nF, Li = 0µH	
CSA 221421	

### AC980-1D

4 Pin Connector

Connector Pin	Polarity
A (Axis Y)	(+) Signal/Power
B (Axis X)	(+) Signal/Power
C (Axis Z)	(+) Signal/Power
D	(-) Common




Stock Product

### AC980-2D

CB192 Integral Cable

Conductor	Polarity
Red (Axis Y)	(+) Signal/Power
Green (Axis X)	(+) Signal/Power
White (Axis Z)	(+) Signal/Power
Black	(-) Common




Built To Order

### AC980-3D

CB218 Armored Integral Cable


Conductor	Polarity
Red (Axis Y)	(+) Signal/Power
Green (Axis X)	(+) Signal/Power
White (Axis Z)	(+) Signal/Power
Black	(-) Common



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC980	M/AC980	<b>Environmental</b>		
Sensitivity (±10%)		100 mV/g	Operating Temperature Range	-65 to 250°F	-54 to 121°C
Frequency Response (±3dB)	36-600,000 CPM	0.6-10000 Hz	Electromagnetic Sensitivity		CE
Frequency Response (±10%)	60-390,000 CPM	1.0-6500 Hz	Sealing		Welded, Hermetic
Dynamic Range		± 50 g, peak	<b>Physical</b>		
<b>Electrical</b>			Sensing Element		PZT Ceramic
Settling Time		<2.5 seconds	Weight	7.1 oz	200 grams
Voltage Source (IEPE)		18-28 VDC	Case Material		316L Stainless Steel
Constant Current Excitation		2-10 mA	Mounting Thread		1/4-28 Captive Bolt
Spectral Noise @ 10 Hz		27 µg/√Hz	Connector (Non-Integral)		4 Pin J Connector
Spectral Noise @ 100 Hz		6.5 µg/√Hz	Mounting Torque	1 to 2 ft. lbs	1,4 to 2,7 Nm
Spectral Noise @ 1000 Hz		2.5 µg/√Hz	Mounting Hardware Supplied	1/4-28 Captive Bolt	M6x1 Captive Bolt
Output Impedance		<100 ohm	Calibration Certificate		CA10
Bias Output Voltage		10-14 VDC			
Case Isolation		>10 <sup>8</sup> ohm			

## Typical Frequency Response

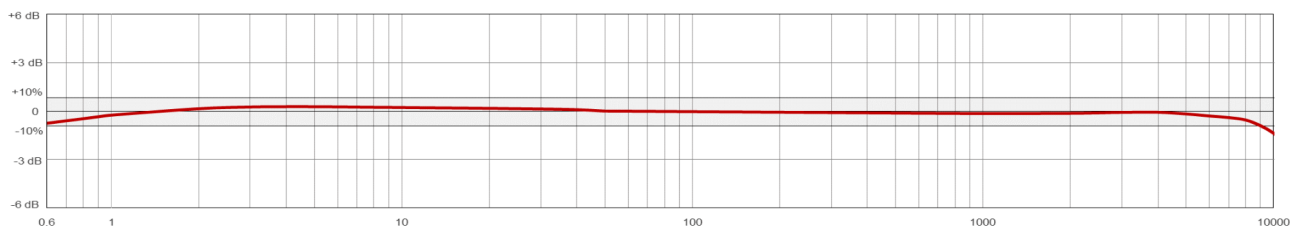

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900