

B3A Series





VIBRATION ANALYSIS HARDWARE

3 Socket MIL-Style Seal-Tight Silicone Boot Connector with Polycarbonate Insert, Permanent Mount, 250 °F (121 °C) Max Temp

Product Features

- ▶ 3 Socket Connection for use with CTC Dual Output and Negative Voltage Sensors
- ▶ Silicone Seal-Tight Boot, Polycarbonate Insert
- ▶ IP66 Rated

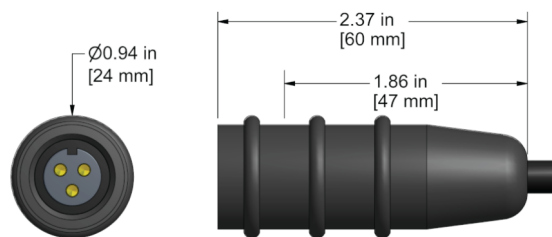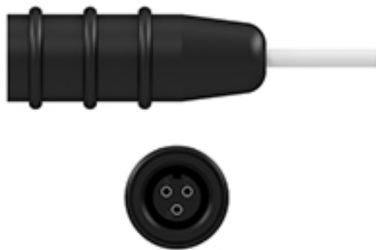

Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	3 Socket Seal-Tight Boot
Shell Material	Silicone
Connector Insert Material	Polycarbonate
Rating	IP66
Pin-Out	A = Signal (+) CTC Red B = Common (-) CTC Black C = Signal (+) CTC White

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900