

B3R Series





VIBRATION ANALYSIS HARDWARE

High Temperature 3 Socket MIL-Style Seal-Tight Silicone Boot Connector with PPS Insert, Permanent Mount, 350 °F (177 °C) Max Temp

Product Features

- ▶ 3 Socket Connection
- ▶ Silicone Seal-Tight Boot, PPS Insert
- ▶ IP66 Rated

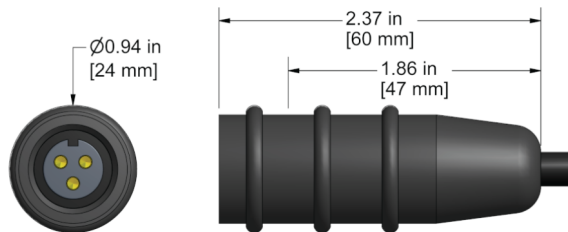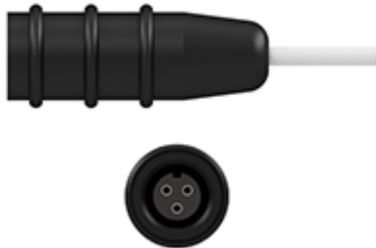

Specifications

Application	Permanent Mount
Max Temperature	350 °F (177 °C)
Connector Type	3 Socket Seal-Tight Boot
Shell Material	Silicone
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP66
Pin-Out	A = Signal (+) B = Signal (-) C = Signal (+)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900