

# C330 Series




CSI Speedvue Compatible, 4 Pin LEMO, Single Channel Acceleration Input, Pin 1 Shield/Drain, Pin 3 Common (-), Pin 4 Signal/Power (+)

VIBRATION ANALYSIS HARDWARE

## Product Features

- ▶ 4 Pin LEMO Connector for Single Channel Acceleration Input

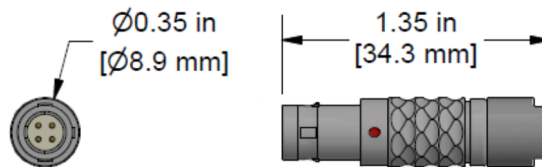

## Specifications

Application	Portable Measurements
Max Temperature	248 °F (120 °C)
Connector Type	4 Pin LEMO
Shell Material	Chrome-Plated Copper
Connector Insert Material	PEEK
Rating	IP66
Pin-Out	Pin 1 Shield/Drain Pin 3 Common (-) Pin 4 Signal/Power (+)

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900