


C416 Series



VB Series Compatible, 7 Pin LEMO® Connector, Triaxial
Acceleration Input, Pin 1 Common (-), Pin 2 (X Axis), Pin 3 (Y Axis),
Pin 4 (Z Axis)

Product Features

- ▶ 7 Pin LEMO Connector for Triaxial Acceleration Input

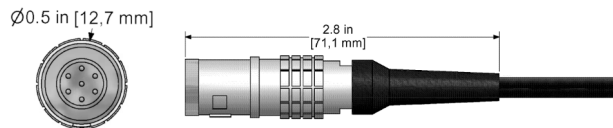

Specifications

Application	Portable Monitoring
Max Temperature	392 °F (200 °C)
Connector Type	7 Pin LEMO® Connector
Shell Material	Brass
Connector Insert Material	PEEK
Rating	IP66 Rated
Pin-Out	Pin 1: Common (-) Pin 2: X Axis Pin 3: Y Axis Pin 4: Z Axis

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900