

C464 Series




VIBRATION ANALYSIS HARDWARE

VB8 Compatible, 4 Socket Twistlok Connector, Triaxial Acceleration Input, Pin 1 (X Axis), Pin 2 (Y Axis), Pin 3 (Z Axis), Pin 4 Common (-)

Product Features

- ▶ 4 Socket Twistlok Connector for Triaxial Acceleration

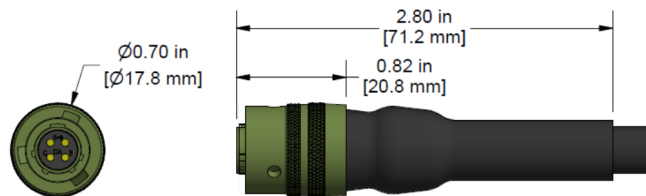

Specifications

Application	Portable
Max Temperature	257 °F (125 °C)
Connector Type	4 Socket Twistlok Connector
Shell Material	Aluminum
Connector Insert Material	Neoprene
Pin-Out	Pin 1: X-Axis Pin 2: Y-Axis Pin 3: Z-Axis Pin 4: Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900