

C484 Series




VIBRATION ANALYSIS HARDWARE

SKF DLI/DCA-31 Compatible, 6 Pin Fischer Connector, Triaxial Acceleration Input, Pin 1 (X Axis), Pin 2 (Y Axis), Pin 5 Common (-), Pin 6 (Z Axis)

Product Features

- ▶ 6 Pin Fischer Connector for Triaxial Acceleration Input

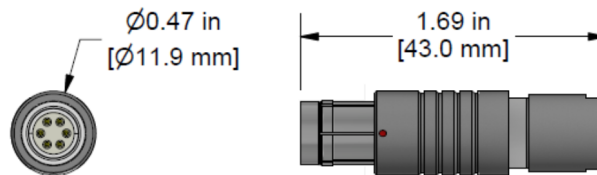

Specifications

Application	Portable Measurements
Max Temperature	392 °F (200 °C)
Connector Type	6 Pin Fischer Connector
Shell Material	Chrome-Plated Brass
Connector Insert Material	PEEK
Rating	IP66
Pin-Out	Pin 1 (X Axis) Pin 2 (Y Axis) Pin 5 Common (-) Pin 6 (Z Axis)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900