


C49 Series

25 Pin Connector, Wired for CSI Velocity Input



Product Features

- ▶ IP66 Rating

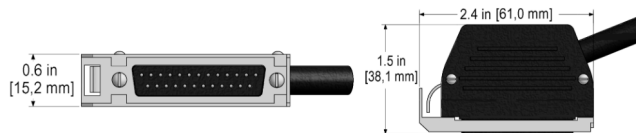

Specifications

Application	Portable Monitoring
Max Temperature	230 °F (110 °C)
Connector Type	25 Pin Subminiature
Shell Material	Thermoplastic
Connector Insert Material	Steel
Rating	IP66 Rated
Pin-Out	22 = Signal/Power (+) 23 = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900