

C4 Series


SKF CMVA Series Compatible, 25 Pin D Subminiature Connector,
Single Axis Acceleration Input



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ For use with SKF acceleration input, CMVA series

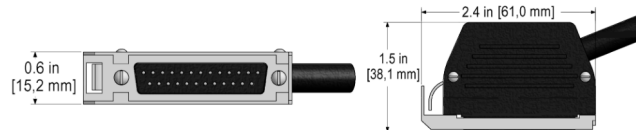

Specifications

Application	Portable Monitoring
Max Temperature	250 °F (121 °C)
Connector Type	25 Pin Subminiature
Shell Material	Thermoplastic
Connector Insert Material	Steel
Rating	IP66 Rated
Pin-Out	20 = Common (-) 22 = Signal/Power (+)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900