

# C516 Series




VIBRATION ANALYSIS HARDWARE

SKF CMXA and DLI/DCA Series Compatible, 6 Socket Fischer® Connector, Wired to mate with C66 (6 Pin Fischer®), Single Channel Acceleration Input

## Product Features

SKF CMXA and DLI/DCA Series Compatible

► Mates with C66

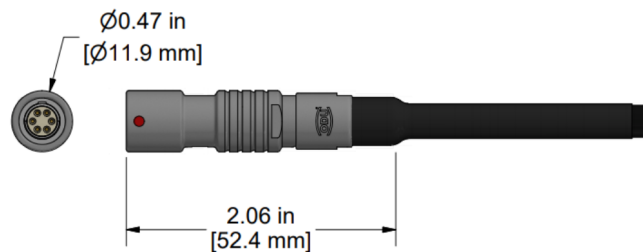

## Specifications

Application	Portable Monitoring
Max Temperature	392 °F (200 °C)
Connector Type	6 Socket Fischer® Connector
Strain Relief	Heat Shrink
Shell Material	Chrome-Plated Brass
Connector Insert Material	PEEK
Rating	IP66 Rated
Pin-Out	1 = Signal/Power (+) 5 = Common (-)

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900