

C531 Series




VIBRATION ANALYSIS HARDWARE

SPM Lenova Diamond Compatible, 8 Pin LEMO® Connector, Single Channel Acceleration Input, Pin 1 Signal/Power (+), Pin 2 Common (-)

Product Features

- ▶ 8 Pin LEMO Connector for Single Channel Acceleration Input

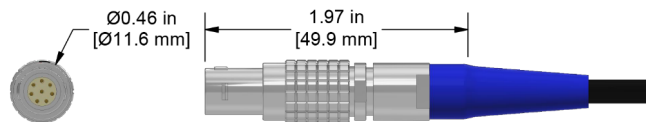

Specifications

Application	Portable Monitoring
Max Temperature	482 °F (250 °C)
Connector Type	8 Pin LEMO® Connector
Shell Material	Stainless Steel
Connector Insert Material	Polycarbonate
Rating	IP66
Pin-Out	Pin 1: Signal/Power (+) Pin 2: Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900