

C533 Series


Lenova Diamond Compatible, Triaxial Acceleration Input, Pin 1 (Z Axis), Pin 2 Common (-), Pin 3 (X Axis), Pin 5 (Y Axis)



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ 8 Pin LEMO Connector for Triaxial Acceleration Input

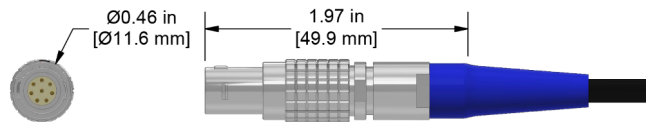

Specifications

Application	Portable Monitoring
Max Temperature	482 °F (250 °C)
Connector Type	8 Pin LEMO® Connector
Shell Material	Stainless Steel
Connector Insert Material	Polycarbonate
Rating	IP66
Pin-Out	Pin 1: Z Axis Pin 2: Common (-) Pin 3: X Axis Pin 5: Y Axis

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900