

C58 Series




VIBRATION ANALYSIS HARDWARE

Emerson 2120 Compatible, 25 Pin Subminiature Connector, Channel 1 Acceleration + Channel 2 Peakvue Input

Product Features

- ▶ For portable monitoring with Peak Vue

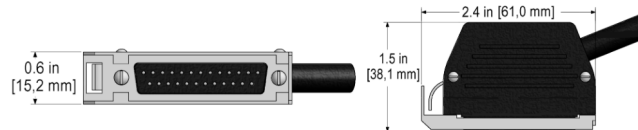

Specifications

Application	Portable Monitoring
Max Temperature	230 °F (110 °C)
Connector Type	25 Pin Subminiature
Shell Material	ThermoPlastic
Connector Insert Material	Steel
Rating	IP66 Rated
Pin-Out	21 = Signal/Power (+) 24 = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900