

C592 Series




VIBRATION ANALYSIS HARDWARE

Azima/DLI Compatible, 4 Socket Tyco/AMP Connector, Triaxial Acceleration Input, Pin 1 (X Axis), Pin 2 (Y Axis), Pin 3 (Z Axis), Pin 4 Common (-)

Product Features

- ▶ 4 Socket Tyco/AMP Connector for Triaxial Acceleration Input
- ▶ Mates with C565

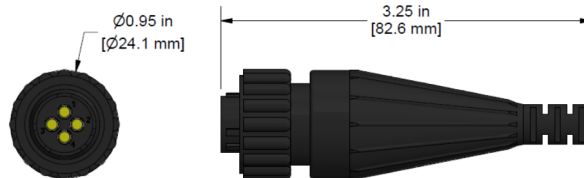

Specifications

Application	Portable
Max Temperature	221 °F (105 °C)
Strain Relief	Polyurethane
Shell Material	Nylon
Connector Insert Material	Thermoplastic
Pin-Out	Pin 1: X-Axis Pin 2: Y-Axis Pin 3: Z-Axis Pin 4: Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900