

C625 Series


ADASH Compatible, Single Channel Acceleration Input, Pin 5
Shield/Drain, Pin 7 Common (-), Pin 8 Signal/Power (+)



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ 8 Pin M12 Connector for Single Channel Acceleration Input
- ▶ Compatible Connectors: J2C, D2C, K2C, D2CG, E, F

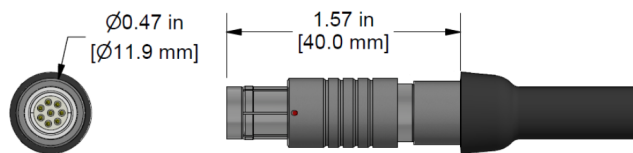

Specifications

Application	Portable
Max Temperature	248 °F (120 °C)
Connector Type	ODU F SERIES CONNECTOR PLUG MALE 8-PIN
Shell Material	Brass, Chrome over Nickel
Connector Insert Material	Polyetheretherketone (PEEK)
Rating	IP50 - Dust Protected
Pin-Out	Pin 5: Shield/Drain Pin 7: Common (-) Pin 8: Signal/Power (+)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900