

C630 Series




VIBRATION ANALYSIS HARDWARE

ADASH Compatible, 8 Pin Circular Connector, Triaxial Acceleration Input, Pin 4 (Z Axis), Pin 5 Shield/Drain, Pin 6 (X Axis), Pin 7 Common (-), Pin 8 (Y Axis)

Product Features

- ▶ 8 Pin Circular Connector for Triaxial Acceleration Input
- ▶ Compatible Connector: J4C

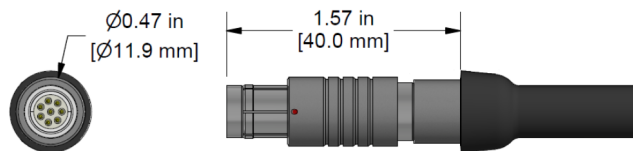

Specifications

Application	Portable
Max Temperature	248 °F (120 °C)
Connector Type	ODU F SERIES CONNECTOR PLUG MALE 8-PIN
Shell Material	Brass, Chrome over Nickel
Connector Insert Material	Polyetheretherketone (PEEK)
Rating	IP50 - Dust Protected
Pin-Out	Pin 4: Z Axis Pin 5: Shield/Drain Pin 6: X Axis Pin 7: Common (-) Pin 8: Y Axis

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900