

C79 Series


TNC Connector



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ 2 Socket Connection
- ▶ Polyphenylene Sulfide (PPS) Insert
- ▶ IP66 Rated

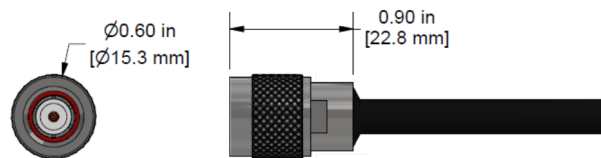

Specifications

Application	Portable Measurements, Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	2 Socket Connector
Shell Material	Nickel-Plated Brass
Connector Insert Material	Polyphenylene Sulfide
Pin-Out	Pin = Signal (+) Case = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900