



CK-A2R Series

High Temperature 2 Socket MIL-Style Connector Kit with PPS Insert and Backshell, 392 °F (200 °C) Maximum Temperature

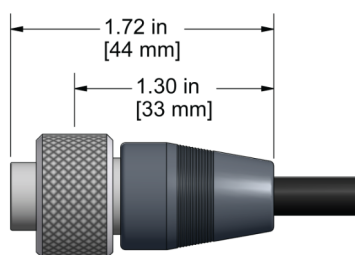

VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ 2 Socket Connection, Crimp Contact
- ▶ 316L Stainless Steel Locking Ring
- ▶ Epoxy Kit (MH109-3D) and Crimp Tool (CB526-18) Separately

Specifications

Application	Permanent Mount
Max Temperature	392 °F (200 °C)
Connector Type	2 Socket MIL-Style
Shell Material	Polyphenylene Sulfide (PPS) Backshell
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP68
Pin-Out	A = Signal (+) B = Signal (-)

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900