


# CK-B2R Series

High Temperature 2 Socket Connector Kit with PPS Insert and Silicone Seal-Tight Boot, 350 °F (177 °C) Maximum Temperature



## Product Features

- ▶ 2 Socket Connection, Crimp Contact
- ▶ Silicone Seal-Tight Boot, PPS Insert
- ▶ Epoxy Kit (MH109-3D) and Crimp Tool (CB52618) Separately

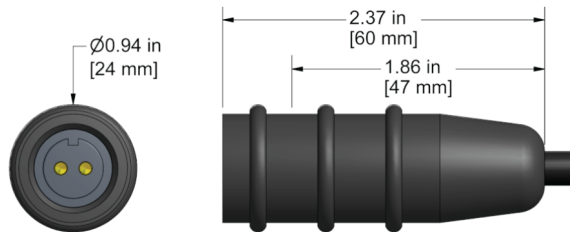

## Specifications

Application	Permanent Mount
Max Temperature	350 °F (177 °C)
Connector Type	2 Socket Seal-Tight Boot
Shell Material	Silicone
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP66
Pin-Out	A = Signal (+) CTC Red B = Common (-) CTC Black

Stock Product

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900