

CK-B3R Series


High Temperature 3 Socket Connector Kit with PPS Insert and Silicone Seal-Tight Boot, 350 °F (177 °C) Maximum Temperature



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ 3 Socket Connection, Crimp Contacts
- ▶ Silicone Seal-Tight Boot, PPS Insert
- ▶ Epoxy Kit (MH109-3D) and Crimp Tool (CB52618) Separately

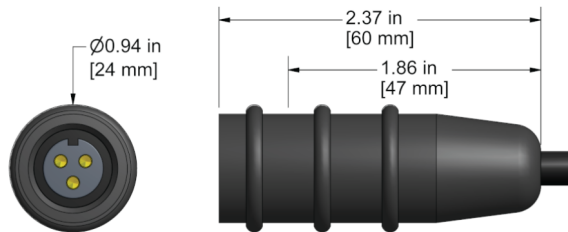

Specifications

Application	Permanent Mount
Max Temperature	350 °F (177 °C)
Connector Type	3 Socket Seal-Tight Boot
Shell Material	Silicone
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP66
Pin-Out	A = Signal (+) B = Signal (-) C = Signal (+)

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900