

CK-D2C Series




VIBRATION ANALYSIS HARDWARE

2 Socket MIL-Spec Style Connector Kit with Neoprene Insert, and Polyurethane Backshell and Strain Relief, 250 °F (121 °C) Maximum Temperature

Product Features

- ▶ 2 Socket Connection, Solder Contacts
- ▶ Rubber Bending Strain Relief
- ▶ IP66 Rated

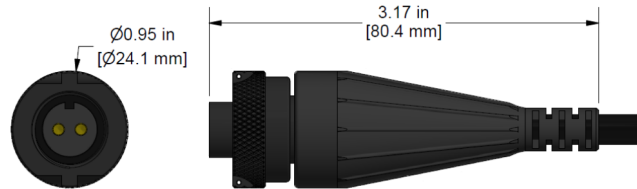

Specifications

Application	Portable Measurements
Max Temperature	250 °F (121 °C)
Connector Type	2 Socket MIL-Spec
Strain Relief	Rubber Bending Strain Relief
Shell Material	Polyurethane
Connector Insert Material	Neoprene
Rating	IP66
Pin-Out	A = Signal (+) B = Common (-)

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900