

CK-D2J Series




VIBRATION ANALYSIS HARDWARE

High Temperature 2 Socket MIL-Spec Style Connector Kit with Diallyl Phthalate Insert and Aluminum Alloy Backshell, 350 °F (177 °C) Maximum Temperature

Product Features

- ▶ 2 Socket Connection, Solder Contacts
- ▶ 350 °F Max Temp
- ▶ Epoxy Kit (MH109-3D) Sold Separately

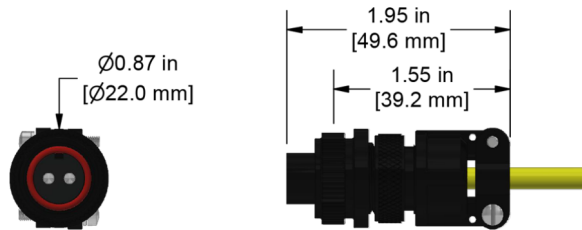

Specifications

Application	Portable Measurements, Permanent Mount
Max Temperature	350 °F (177 °C)
Connector Type	2 Socket MIL-Style
Shell Material	Aluminum Alloy Shell
Connector Insert Material	Diallyl Phthalate
Rating	IP64
Pin-Out	A=Signal (+) B=Common (-)

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900