

CK-J2A Series

2 Socket Mini-MIL Style Connector Kit with Polycarbonate Insert and Backshell, 250 °F (121 °C) Maximum Temperature





VIBRATION ANALYSIS HARDWARE

Product Features

Compatible with CTC Mini-Sized Accelerometers and UEB330

- ▶ 2 Socket Connection, Crimp Contact
- ▶ 316L Stainless Steel Locking Ring
- ▶ Epoxy Kit (MH109-3D) and Crimp Tool (CBS2012) Separately

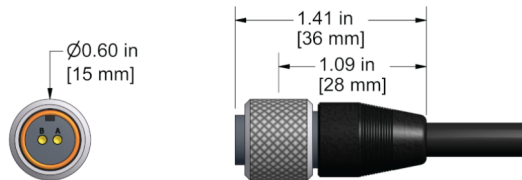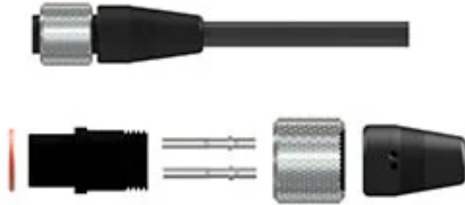

Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	2 Socket Mini-MIL
Shell Material	Polycarbonate Molded Backshell
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-)

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900