

# CK-J2R Series


High Temperature 2 Socket Mini-MIL Style Connector Kit with PPS Insert and Backshell, 392 °F (200 °C) Maximum Temperature



VIBRATION ANALYSIS HARDWARE

## Product Features

- ▶ 2 Socket Connection, Crimp Contacts
- ▶ High Temp 392 °F (200 °C)
- ▶ Epoxy Kit (MH109-3D) and Crimp Tool (CB52618) Separately

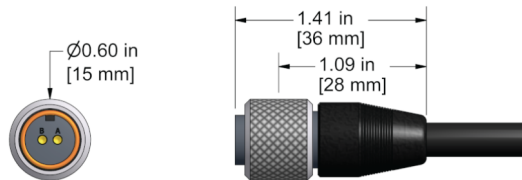

## Specifications

Application	Permanent Mount
Max Temperature	392 °F (200 °C)
Connector Type	2 Socket Mini-MIL
Shell Material	Polyphenylene Sulfide (PPS)
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-)

Stock Product

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900