

CK-J4A Series

4 Socket Mini-MIL Style Connector Kit with Polycarbonate Insert and Backshell, 250 °F (121 °C) Maximum Temperature




VIBRATION ANALYSIS HARDWARE



Product Features

Compatible with CTC Triaxial Accelerometers

- ▶ 4 Socket Connection, Crimp Contacts
- ▶ Compatible with CTC Triaxial Accelerometers
- ▶ Epoxy kKit (MH103-3D) and Crimp Tool (CB926-1A) Sold Separately

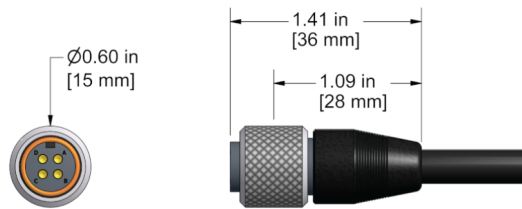

Specifications

Application	Permanent Mount
Max Temperature	250 ° F (121 ° C)
Connector Type	4 Socket Mini-MIL
Shell Material	Polycarbonate Molded Backshell
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900