

CK-J4R Series


High Temperature 4 Socket Mini-MIL Style Connector Kit with PPS Insert and Backshell, 392 °F (200 °C) Maximum Temperature



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ 4 Socket Connection, Crimp Contacts
- ▶ For use with CTC Triaxial Accelerometers
- ▶ Epoxy Kit (MH109-3D) and Crimp Tool (CB52618) Separately

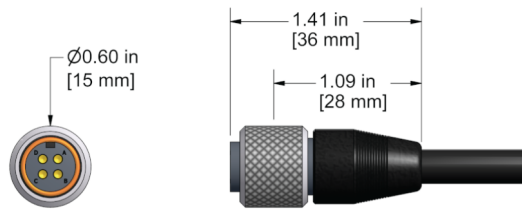

Specifications

Application	Permanent Mount
Max Temperature	392 °F (200 °C)
Connector Type	4 Socket Mini-MIL
Shell Material	Polyphenylene Sulfide (PPS) Backshell
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP68
Pin-Out	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900