CK-M2A Series
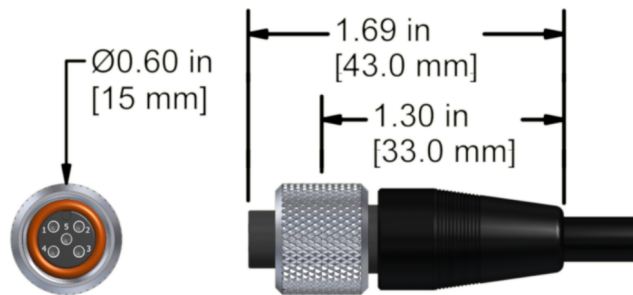
5 Socket M12-Style Connector Kit with Polycarbonate Insert and Backshell, for use with 2 Conductor Cables, 250 °F (121 °C) Maximum Temperature

CTC VIBRATION ANALYSIS HARDWARE

Product Features

▶ 5 Socket M12 for use with 2 Conductor Cable, Solder Contacts

▶ 316L Stainless Steel Locking Ring

▶ IP66 Rated

Ø0.60 in [15 mm]

1.69 in [43.0 mm]

1.30 in [33.0 mm]

Specifications	
Application	Portable Measurement Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	5 Socket M12 Connector
Shell Material	Polycarbonate Backshell
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	1 = Signal (+) 2 = Common (–)

Stock Product