

CK-M4A Series




5 Socket, M12 Connector Kit for use with 4 Conductor Cable, Molded Polycarbonate Backshell, 250 °F (121 °C) Max Temp

VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ 5 Socket M12 Connection with 4 Live Sockets, for use with CTC Triaxial, M12 Connector Exit Sensors
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance
- ▶ Epoxy Kit (MH109-3D) Sold Separately

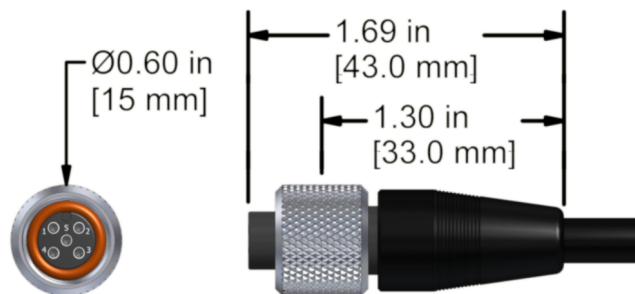

Specifications

| | |
|---------------------------|---|
| Application | Permanent Mount |
| Max Temperature | 250 °F (121 °C) |
| Connector Type | 5 Socket M12 Connector |
| Shell Material | Polycarbonate Backshell |
| Connector Insert Material | Polycarbonate |
| Rating | IP68 |
| Pin-Out | Socket 1 = Ch. Y (+), Red Conductor Socket 2 = Ch. X (+), Green Conductor Socket 3 = Ch. Z (+), White Conductor Socket 4 = Common (-), Black Conductor |

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900