

CK-R2C Series



2 Pin MIL-Style Connector Kit with Polyurethane Backshell and Strain Relief, 250 °F (121 °C) Maximum Temperature



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ 2 Socket Connection, Solder Contacts
- ▶ Epoxy Kit (MH109-3D) Sold Separately

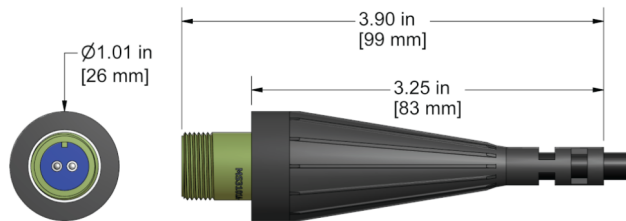

Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	2 Pin MIL-Style
Strain Relief	Polyurethane
Shell Material	Polyurethane
Rating	IP66
Pin-Out	A = Signal (+) B = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900