

CK-V2J Series



VIBRATION ANALYSIS HARDWARE

2 Socket MIL-Style Connector Kit with Polycarbonate Insert and Silicone Seal-Tight Boot, 250 °F (121 °C) Maximum Temperature

Product Features


- ▶ IP69-Rated Viton® Seal-Tight Boot, for use with 2 Pin Mini-MIL Accelerometers
- ▶ 2 Socket, Crimp Contacts
- ▶ Epoxy Kit (MH109-3D) and Crimp Kit (CB92613) Separately



Ø0.70 in
[Ø17.7 mm]



2.90 in
[73.7 mm]

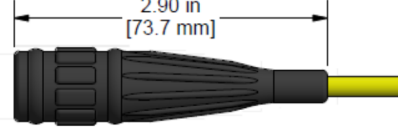

Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	2 Socket Viton® Seal-Tight Boot
Shell Material	Viton®
Connector Insert Material	Polycarbonate
Rating	IP69
Pin-Out	A = Signal (+) Red B = Common (-) Black

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900