# CKP-A2A Series

Low Cost 2 Socket MIL-Style Connector Kit with Polycarbonate Insert and Backshell, 250 °F (121 °C) Maximum Temperature
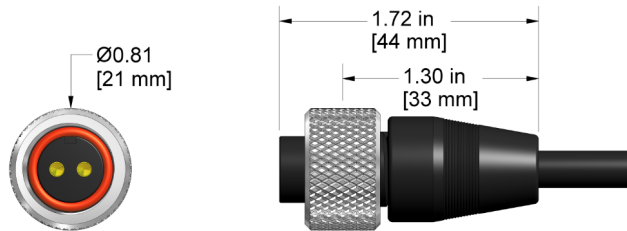
**CTC**
VIBRATION ANALYSIS HARDWARE

## Product Features

Compatible with CTC MA Series Sensors

Low Cost

▶ 2 Socket Connection, Crimp Contacts

▶ Polycarbonate Backshell, Locking Ring & Insert

▶ Epoxy Kit (MH109-3A) and Crimp Tool (CB204-1A) Sold Separately

Ø0.81 [21 mm]

1.72 in [44 mm]

1.30 in [33 mm]

## Specifications

| | |
|---|---|
| Application | Permanent Mount |
| Max Temperature | 250 °F (121 °C) |
| Connector Type | 2 Socket MIL-Style |
| Shell Material | Polycarbonate |
| Connector Insert Material | Polycarbonate |
| Rating | IP68 |
| Pin-Out | A = Signal (+) B = Common (-) |

**Built to Order**