


CMX2251



VIBRATION ANALYSIS HARDWARE

Emerson 2130 Compatible, 2 Channel 5 Pin Molded M12 Connector to 2 Molded M12 Sockets Wired, 17 in. (43 cm) Overall Length, Dual Channel Acceleration Input, Channel A (Yellow) and Channel B (Blue) (Comparable to Emerson PN: A06290A)

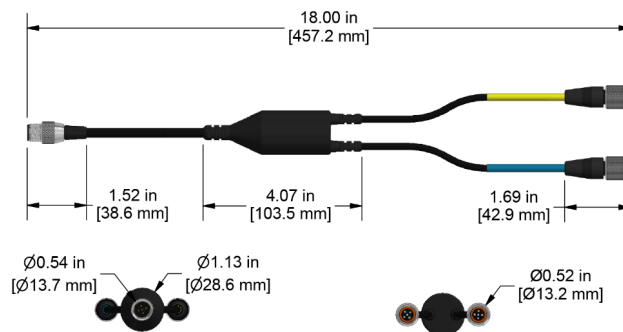

Specification

Jacket Material	Polyurethane
Cable Length	17 in. (43 cm) ± 1 in. (2.5 cm)
Connectors	5 Pin Molded M12, to Two Molded M12 Sockets Labeled: Chan A (Yellow) Chan B (Blue)
Input	Acceleration Input Only
Cable Diameter	One 0.25 in. (6.35 mm) Cable into Two 0.175 in. (4.45 mm) Cables
Conductor Cable	One 4 Conductor Cable into Two 2 Conductor Cables
Max Temperature	250 °F (121 °C)

Compatible Data Collectors

CSI2130 only

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900