

CRHT102 Series

High Temperature Cable Reduction Box, Fiberglass Enclosure,
NEMA 4X (IP66) Rated, -40 to 212 °F (-40 to 100 °C)



VIBRATION ANALYSIS HARDWARE




Product Features

Reduce Cable Clutter in High Temperature Areas.

Ideal solution for consolidating cables & reducing costs.


- ▶ Reduce up to 16 individual cables to one multi-conductor cable.
- ▶ Can reduce cable costs by as much as 75%.
- ▶ Exit conduit comes pre-installed for boxes with factory penetrations (no exit conduit is supplied if User Defined is selected).

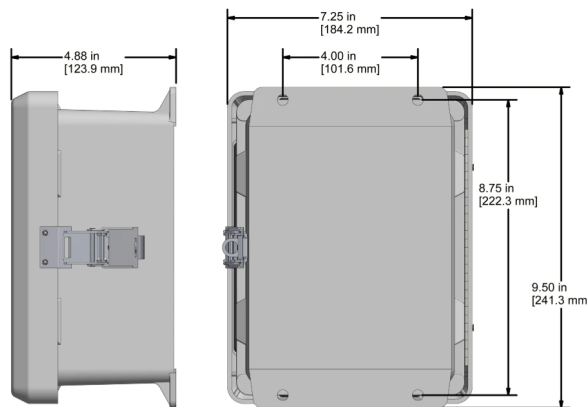

Specifications

Temperature Range	-40 to 212 °F (-40 to 100 °C)
Enclosure Material	Fiberglass
Inputs	Terminal Block 3 Inputs per Channel (+, -, Shield)
Outputs	Terminal Block 3 Inputs per Channel (+, -, Shield)
Sensor Input Options	12 or 16 Channels
Rating	NEMA 4X (IP66)
Door Closure	Snap Latch
Dimensions	7.25 x 9.50 x 4.88 in. (184 x 241 x 124 mm)
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

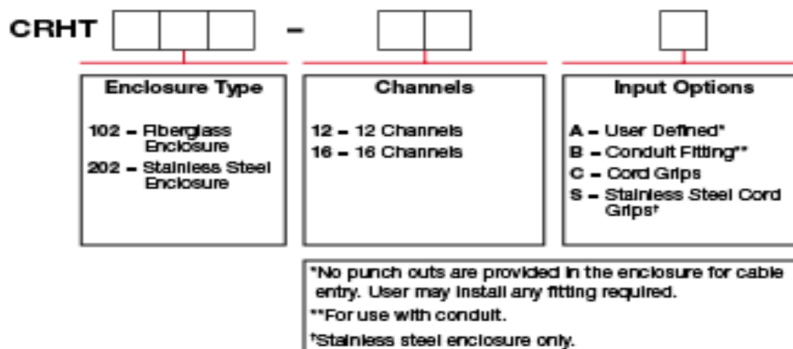

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900