

D2C Series

2 Socket MIL-Spec Connector with Custom Molded Polyurethane Strain Relief, Portable Measurement, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE

Product Features

2 Socket Connection

- ▶ Rubber Bending Strain Relief
- ▶ IP66 Rated
- ▶ CTC to Emerson PN Cross Reference Guide:
 - CB103-D2C-004-F-RR \cong D25489
 - CB103-D2C-004-F-BB \cong D25490
 - CB103-D2C-004-F-WW \cong D25491
 - CB103-D2C-004-F \cong D25492
 - CB103-D2C-009-F-RR \cong D25506
 - CB103-D2C-009-F

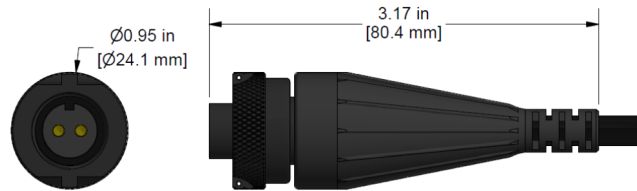

Specifications

Application	Portable Measurements
Max Temperature	250 °F (121 °C)
Connector Type	2 Socket MIL-Spec
Strain Relief	Rubber Bending Strain Relief
Shell Material	Polyurethane
Connector Insert Material	Neoprene
Rating	IP66
Pin-Out	A = Signal (+) B = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900