

D2CG Series


2 Socket MIL-Spec Connector, Grounded to Sensor Case, Portable Measurement, 250 °F (121 °C) Max Temp



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ 2 Socket Connection
- ▶ Polyurethane Molded
- ▶ IP66 Rated

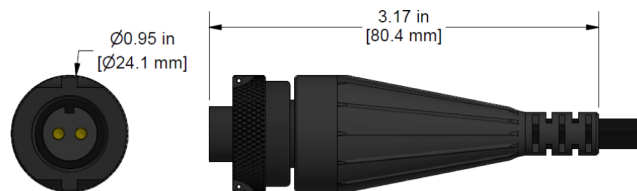

Specifications

Application	Portable Measurements
Max Temperature	250 °F (121 °C)
Connector Type	2 Socket MIL-Spec
Strain Relief	Rubber Bending Strain Relief
Shell Material	Polyurethane
Connector Insert Material	Nylon
Pin-Out	A = Signal (+) B = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900