

# D2D Series




VIBRATION ANALYSIS HARDWARE

2 Socket MIL-Spec Right-Angle Connector, Polyurethane Molded, Portable Measurement, 250 °F (121 °C) Max Temp



## Product Features

- ▶ 2 Socket Connection
- ▶ Polyurethane Molded
- ▶ IP64 Rated

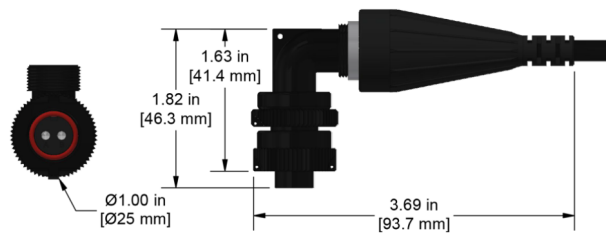

## Specifications

Application	Portable Measurements
Max Temperature	250 °F (121 °C)
Connector Type	Right-Angle MIL-Spec
Shell Material	Polyurethane Molded Backshell
Pin Contact Material	Aluminum Alloy
Rating	IP64
Pin-Out	A = Signal (+) B = Common (-)

**Built to Order**

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900